






202853

TKHM-Z/TSM-Z/I

Function adapters

- Suitable for all standard sensors
- Compact design
- Can be retrofitted quickly and easily
- High temperature use range
- LED display for status and switching output

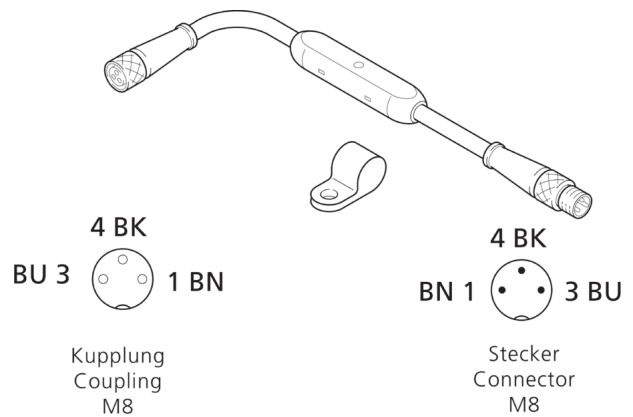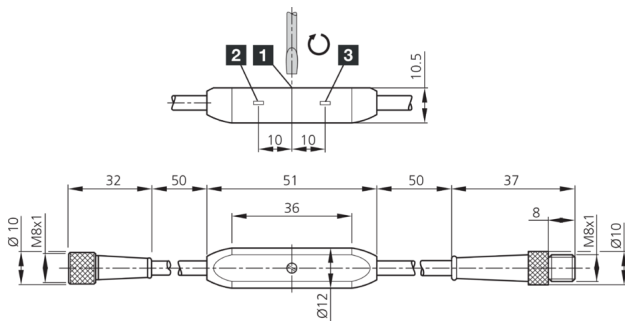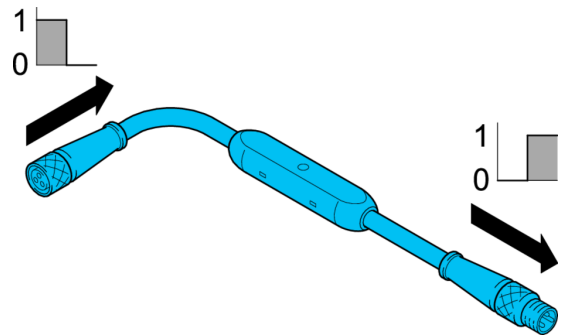

- 1) Potentiometer (only ...TSM-Z/T)
- 2) LED STATUS

3) LED SWITCHING OUTPUT

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

Current-carrying capacity	200 mA, short-circuit-proof
Service voltage	10 ... 35 V DC
No-load current (max.)	20 mA
Thread	M8 x 1
Housing material	Plastic
Protection class	III, operation on protective line
Evaluation	pnp inverter
Application	Digital signal
Function selection	pnp
Switching output	pnp
Switching frequency	3500 Hz
Ambient temperature during operation	-20 ... +70 °C
Protection type	IP 67
Connection	Pigtail, Coupling, M8, 3-pin
Connection 2	Pigtail, Connector, M8, 3-pin

More information / accessories

<https://www.di-soric.com/202853>