






203954
BSHM-W-2/8A
Connection cable

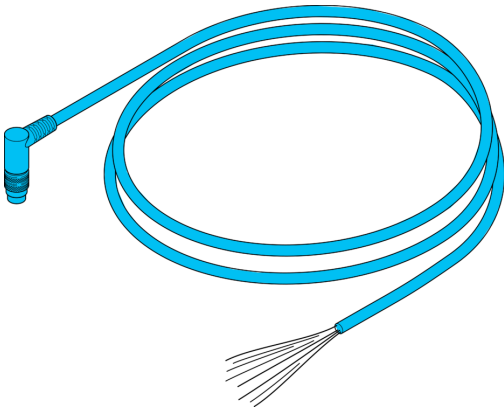

Function														 	
Technical data (typ.)															
Length							2,000 mm								
Material							■ PU sleeve (Coating) ■ Polyurethane (Connector)								
Component							Connection cable								
Design							Angled / open cable end								
To be used for							FSB 10 M G1-B8, FSB 50 M 60 G3-B8, FSB 50 M G3-B8, FS 50 M 60 G3-B8, FS 50 M G3-B8, FS 12-100-1 M G3-B8, FS 12-100-1 M G3-B8-E, FS 12-100-2 M G3-B8, FS 12-100-2 M G3-B8-PB								
For FSB 10 M G1-B8							To be used								
For FSB 50 M 60 G3-B8							To be used								
For FSB 50 M 60 G3-B8							To be used								
For FS 50 M 60 G3-B8							To be used								
For FS 50 M G3-B8							To be used								
For FS 12-100-1 M G3-B8							To be used								
For FS 12-100-1 M G3-B8-E							To be used								
For FS 12-100-2 M G3-B8							To be used								
Ambient temperature during operation							-25 ... +70 °C								
Protection type							IP 67								
Connection							Connector, M9, 8-pin								
Connection 2							flying leads								
Cross-section							0.14 x 0.14 mm (8 x)								
More information / accessories							https://www.di-soric.com/203954								