


- Baffle protection at the optics
- Metal potentiometer
- Cross bar, removable
- Air nozzle for the optics
- NO/NC, switchable
- Variable operating principle: dynamic or static
- Sensitivity adjustment
- Pulse stretching adjustable
- High resolution
- Short response time



--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

© dj-soric . Right to change reserved . 06.02.2024 . Page 1

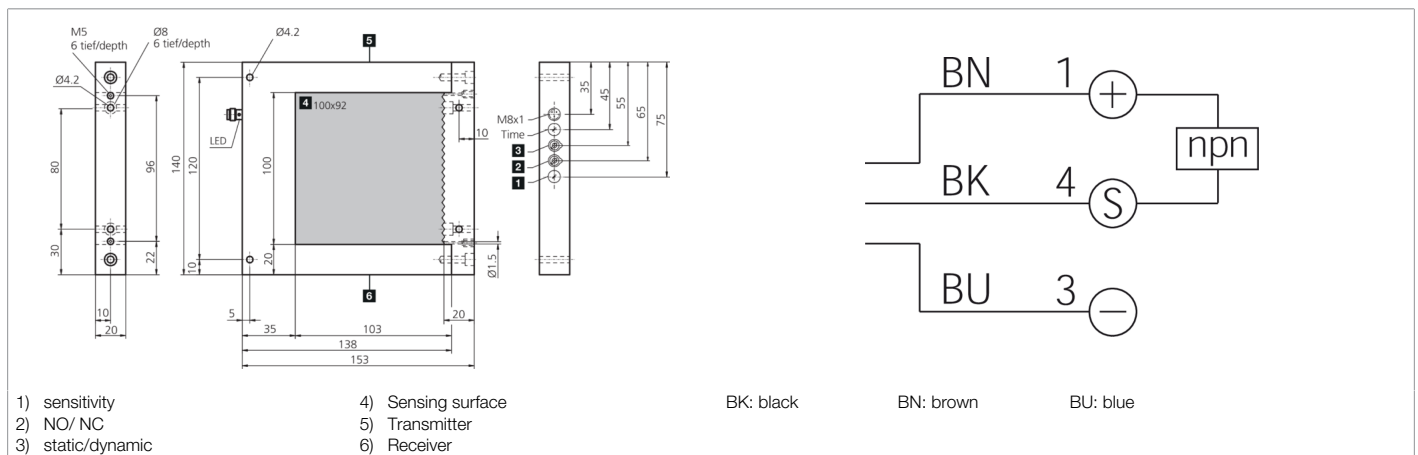

201400
OGWSD 100 N3K-TSSL
Frame light barrier

Technical data (typ.)

Connection cable

+20°C, 24 V DC

TK ...

More information / accessories

<https://www.di-soric.com/201400>