




202140
WRBE 2000 K-M4-M2.5-1.5
Plastic fiber optics

- Long range
- Attachment optics applicable

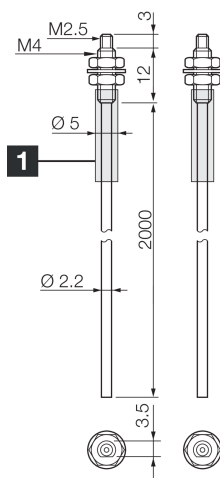

1) Protective tube

Technical data (typ.)	+20°C
Length	2,000 mm
Thread	M4
Light aperture	axial, Attachment optics applicable
Bending radius	> 25 mm
Material of fiber	PMMA
Material	■ Nickel-plated brass (Thread sleeve) ■ PE (Coating)
Operating principle	Through-beam sensor
Design	Thread
Single fiber-optics	Ø 2.2 mm
Single fiber	Ø 1.0 mm (151 x 0.075 mm)
To be used for	Device series OLV-K Amplifier
Opening angle	58°
Range	680 mm
Temperature resistance	-40 ... +70 °C
More information / accessories	https://www.di-soric.com/202140