




202153
WRBT 2000 KBF-M6-1.0
Plastic fiber optics

- Small bending radius
- Flexible probe made of stainless steel

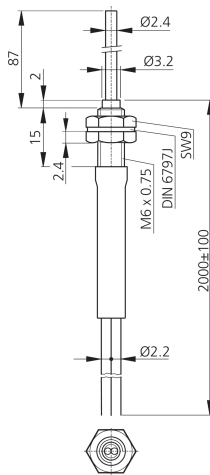

Technical data (typ.)

Length	2,000 mm
Thread	M6 x 0.75
Light aperture	axial, Flexible sensor probe
Bending radius	> 2.5 mm
Bending radius of probe	> 25 mm
Material of fiber	PMMA
Material	■ Stainless steel (Sensor probe) ■ VA (Thread sleeve) ■ PE (Coating)
Operating principle	Diffuse sensor
Design	Thread
Single fiber-optics	Ø 2.2 mm
Single fiber	Ø 1.0 mm (151 x 0.075 mm)
To be used for	Device series OLV-K Amplifier
Opening angle	56°
Range	150 mm
Temperature resistance	-55 ... +70 °C

More information / accessories

<https://www.di-soric.com/202153>