




203099 OGUFIX 051 P2K-TSSL Fork light barrier

- Quick commissioning, no setting elements
- No risk of incorrect adjustments
- Value for money
- Metal casing
- High protection type

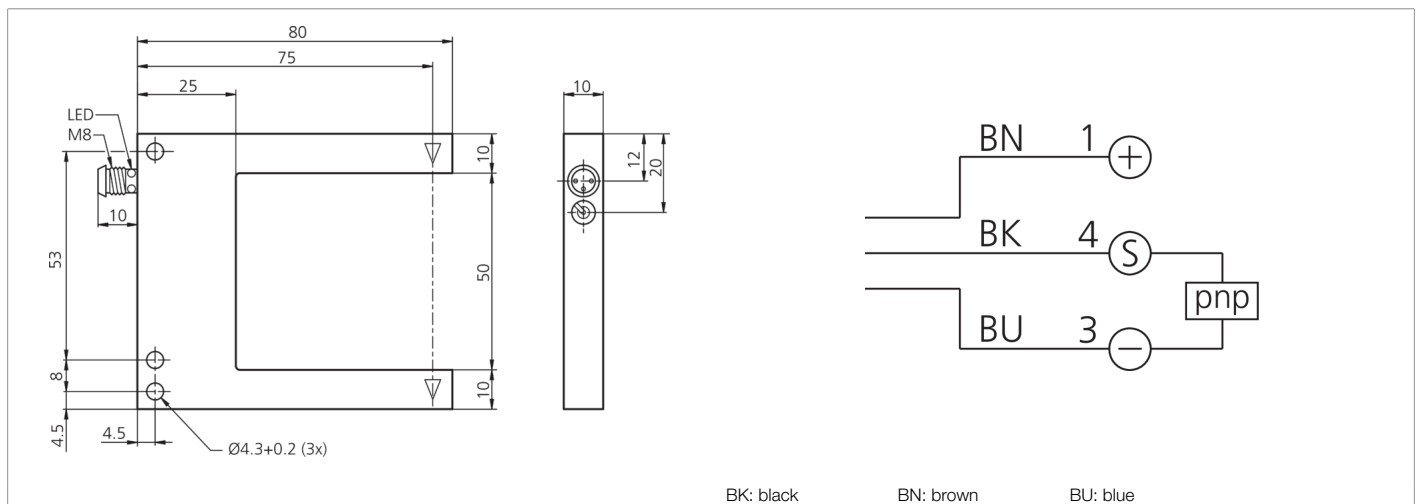

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	10 V ... 35 V DC (Supply Class 2)
No-load current (max.)	30 mA
Insulation voltage endurance	500 V
Leg length internal	55 mm
Housing dimensions	70 x 80 x 10 mm
Housing length	80 mm
Housing height	70 mm
Housing width	10 mm
Housing material	Die-cast zinc (gray, painted)
Protection class	III, operation on protective low voltage
Operating principle	Through-beam sensor
Evaluation	digital
Design	Fork
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2.8 V
Light source	LED
Color	red
Wavelength	660 nm
Modulation	Clocked
Ambient light immunity	40 kLx
Fork opening	50 mm



203099
OGUFIX 051 P2K-TSSL
Fork light barrier

Technical data (typ.)		+20°C, 24 V DC
Resolution		Ø 1.0 mm
Reproducibility		0.04 mm
Switching frequency		2500 Hz
Ambient temperature during operation		-10 ... +60 °C
Protection type		IP 67
Connection		Connector, M8, 3-pin
Connection cable		TK ...
More information / accessories		https://www.di-soric.com/203099