



High-performance angled light barriers

-

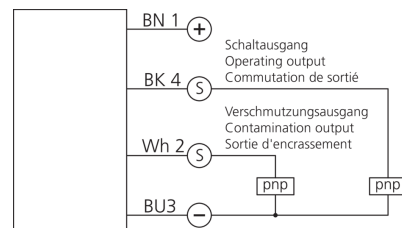

- WH: white

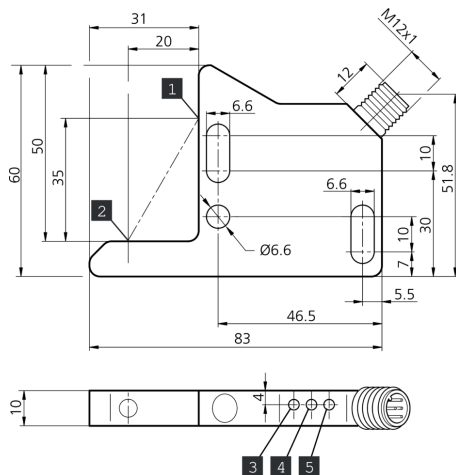

+20°C, 24 V DC

di-soric GmbH & Co. KG · Steinbeisstraße 6 · DE-73660 Urbach · www.di-soric.com



204197

OGL 50/31 P6L-RIBS

High-performance angled light barriers

Technical data (typ.)	+20°C, 24 V DC
Wavelength	660 nm
Modulation	Clocked
Ambient light immunity	5 kLx
Range	40 mm (optical axis)
Sensitivity adjustment	no setting elements
Switching frequency	200 Hz
Ambient temperature during operation	-10 ... +60 °C
Protection type	IP 67
Connection	Connector, M12, 4-pin
Connection cable	VK ...
More information / accessories	https://www.di-soric.com/204197