
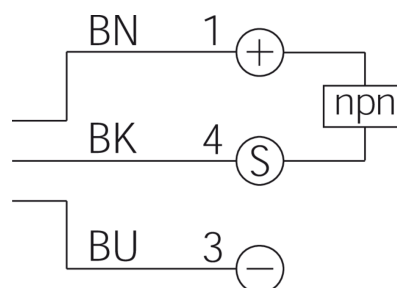


Inductive proximity sensor

-
- A close-up photograph of a threaded metal rod. A hex nut is partially threaded onto the rod. Below the nut, a small ball bearing is visible, seated within the threads of the rod. The rod extends downwards from the bearing.

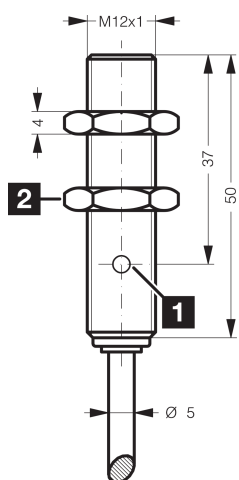

BU: blue

CE



+20°C, 24 V DC

di-soric GmbH & Co. KG · Steinbeisstraße 6 · DE-73660 Urbach · www.di-soric.com



205224
DCC 12 M 08 NOLK
Inductive proximity sensor

Technical data (typ.)**+20°C, 24 V DC**

Ambient temperature during operation

-25 ... +70 °C

Protection type

IP 67

Connection

Cable, 2.0 m, A-coded

More information / accessories<https://www.di-soric.com/205224>