
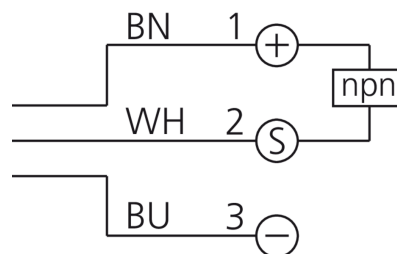


Inductive proximity sensor

-
- A vertical stainless steel threaded rod with two hexagonal nuts and a washer. The rod has a long threaded section in the middle, flanked by shorter threaded sections at the top and bottom. The top and bottom sections are shorter and have a different thread pitch. The middle section is longer and has a standard thread pitch. The nuts are positioned on the top and bottom sections, and a washer is positioned on the middle section.

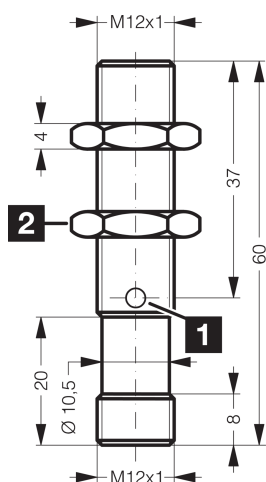

WH: white

CE



+20°C, 24 V DC

di-soric GmbH & Co. KG · Steinbeisstraße 6 · DE-73660 Urbach · www.di-soric.com

**205226****DCC 12 M 08 NOK-IBSL****Inductive proximity sensor****Technical data (typ.)****+20°C, 24 V DC**

Protection type

IP 67

Connection

Connector, M12, 4-pin, A-coded

Connection cable

VK ...

More information / accessories<https://www.di-soric.com/205226>