
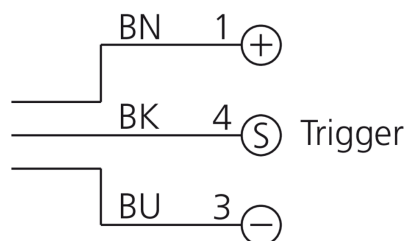


Area light

-

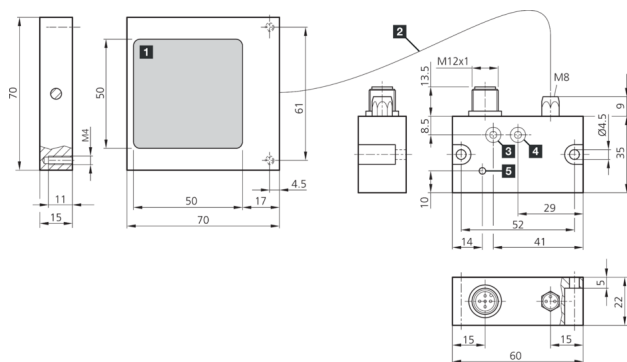

- BU: blue

+20°C, 24 V DC

10 ... 35 V DC (Supply Class 2)
300 mA (10 V DC)
3.3 W (10 ... 35 V DC)
50 x 50 mm
Stainless steel (V4A, 1.4404 / AISI 316L - 1
III, operation on protective low voltage
Free group
Area light
3.3 ... 35.0 V
< 2.8 V
LED
White
5600 K
120°
External control of power
LED Green - Operating display
30 g, 11 ms / 10 ... 55 Hz, 1.0 mm
0 ... +40 °C
IP 69K (Lighting) / IP 67 (Electronic control)
Cable, 5.0 m, M8, 4-pin (Lighting), M12 (El

<https://www.di-soric.com/206346>



206346
BEE-F50/50V-G5TI-IBS
Area light