



Ringlight

-

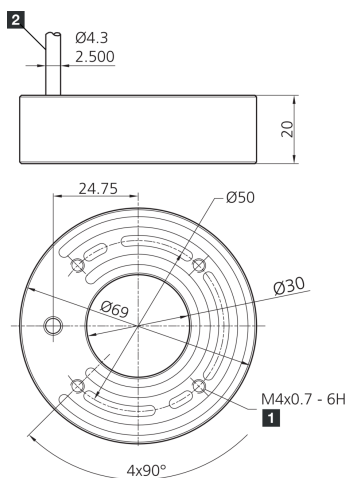

2) Connection cable



A utiliser exclusivement
avec un contrôleur
d'impulsion connecté a
une alimentation *Class 2*!

+20°C, 24 V DC

Power consumption (in pulse / max.)	30.0 W
Energization factor (in pulse / max.)	8
Energization (in pulse / max.)	2000 mA
Service voltage	No constant voltage!
Inverse polarity protection	Yes
Insulation voltage endurance	500 V
Diameter	Ø 30 / Ø 69 mm (Diameter)
Height	20 mm
Housing material	Aluminum (Black, Anodized)
Material	■ Polyurethane (Cable) ■ PMMA, clear (Protection optics)
Risk group (DIN EN 62471)	Free group
Design	Ringlight
Light source	LED
Color	red (clear)
Wavelength	633 nm
Deflection angle FWHM	30°



207139
BE-R30-F1-K-CLR
Ringlight

Technical data (typ.)

Light intensity

+20°C, 24 V DC

- 7.00 kLx (100.0 mm / 100 %)
- 28.8 kLx (100.0 mm / 400 %)
- 60.5 kLx (100.0 mm / 800 %)
- 3.50 kLx (200.0 mm / 100 %)
- 13.0 kLx (200.0 mm / 400 %)
- 26.8 kLx (200.0 mm / 800 %)

Control

Flashable by means of flash controller

Shock/vibration load

30 g, 11 ms / 10 ... 55 Hz, 1.0 mm

Ambient temperature during operation

0 ... +40 °C

Protection type

IP 67

Connection

Cable, 2.5 m (flying leads, Use only with flash controller!)

More information / accessories

<https://www.di-soric.com/207139>