





208322

OH 18-1 M 130 N4-4

Retroreflective diffuse sensors with background suppression

- Compact design
- Red light
- Sensitivity is adjustable
- High resolution, switching frequency, functional reserve
- High scanning range
- Antivalent output

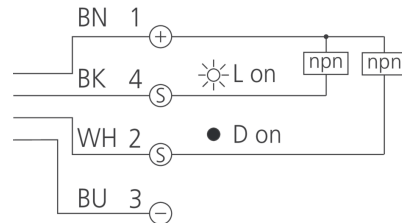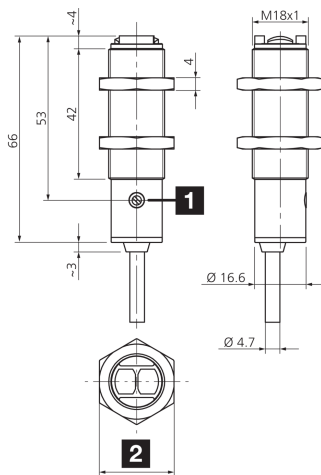

1) Potentiometer

2) Width over flats 24 mm

BK: black

BN: brown

BU: blue

WH: white

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	10 ... 30 V DC
No-load current (max.)	25 mA
Insulation voltage endurance	500 V
Thread	M18 x 1
Housing length	66 mm
Housing material	Brass (CuZn, nickel-plated)
Material of cable	PVC
Material	PMMA (Window)
Protection class	III, operation on protective low voltage
Operating principle	Diffuse sensor with background suppression
Evaluation	digital
Design	Thread
Switching output	npn, 100 mA, antivalent
Voltage drop (max.)	2 V
Light source	LED
Color	red
Wavelength	660 nm
Modulation	Clocked
Background suppression	Yes
Ambient light immunity	5 kLx Halogen light, 10 kLx Sunlight


208322
OH 18-1 M 130 N4-4
Retroreflective diffuse sensors with background suppression

Technical data (typ.)		+20°C, 24 V DC
Scanning range		30 ... 130 mm
Standardized measuring plate		100 x 100 mm (white)
Switching hysteresis (max.)		10 %
Sensitivity adjustment		Potentiometer
Switching frequency		1000 Hz
Response time		0.50 ms
Release time		0.50 ms
Ambient temperature during operation		-25 ... +70 °C
Temperature drift		0.13 mm/K (0.04 mm/K with 60 to 110 mm)
Protection type		IP 67
Connection		Cable, 2.0 m, 4-pin (flying leads)
More information / accessories		https://www.di-soric.com/208322