
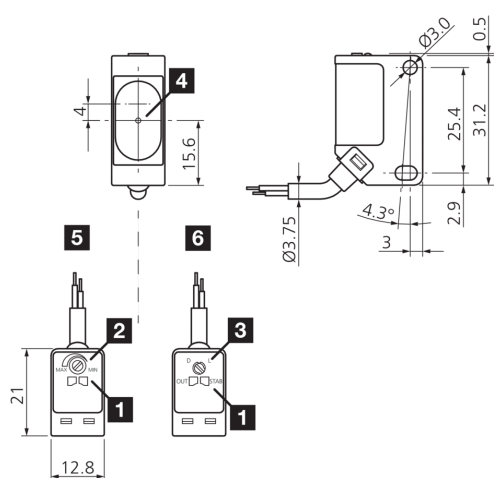


OES 31 K 20000 P3-3



- Set includes transmitter and receiver
- Long range
- Compact design
- Red light
- Sensitivity is adjustable
- Switch for light/dark switching
- Fully molded electronic circuitry, vibration-resistant
- Standardized hole spacing 25.4 mm

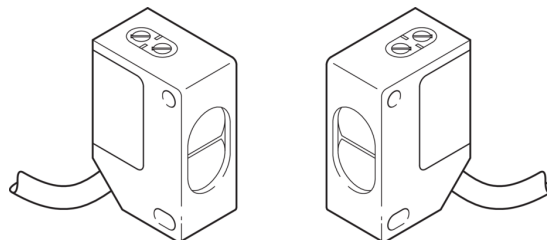

- 4) Optical axis
- 5) Transmitter
- 6) Receiver

BU: blue

Empfänger / Receiver



+20°C, 24 V DC

di-soric GmbH & Co. KG · Steinbeisstraße 6 · DE-73660 Urbach · www.di-soric.com


209273
OES 31 K 20000 P3-3
Through-beam sensor, transmitter / receiver

Technical data (typ.)		+20°C, 24 V DC
Modulation		Clocked
Ambient light immunity		3 kLx Halogen light, 10 kLx Sunlight
Range		0 ... 20000 mm
Switching hysteresis (max.)		10 %
Sensitivity adjustment		Potentiometer
Switching frequency		2000 Hz
Response time		0.25 ms
Release time		0.25 ms
Ambient temperature during operation		-25 ... +70 °C
Temperature drift		20 mm/K
Protection type		IP 67
Connection		Cable, 2.0 m, 3-pin (flying leads)
More information / accessories		https://www.di-soric.com/209273