



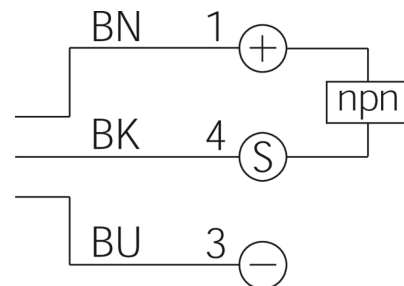

209294
DCB 08 MB 1.5 NS-T3
Inductive proximity sensor

- Metal connector
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- 4 LEDs for switching status display

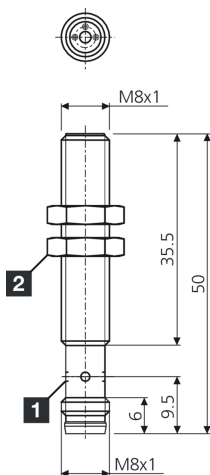

1) LED 4 x 90° (yellow) 2) Width over flats 13 mm BK: black BN: brown BU: blue

Function															CE

Technical data (typ.)		+20°C, 24 V DC
Service voltage		10 ... 30 V DC
No-load current (max.)		< 10 mA
Insulation voltage endurance		500 V
Installation type		Flush
Thread		M8 x 1
Housing length		50 mm
Housing material		Brass (CuZn, nickel-plated)
Material		PBT (Sensor probe)
Protection class		III, operation on protective low voltage
Operating principle		inductive
Evaluation		digital
Design		Thread
Product series		INS Standard
Switching output		npn, 200 mA, NO
Voltage drop (max.)		1.8 V
Switching distance (SN)		1.5 mm
Standardized measuring plate		8 x 8 x 1 mm
Switching hysteresis (max.)		1 ... 20 %
LED Anzeige		Yes
Switching frequency		5000 Hz

**209294****DCB 08 MB 1.5 NS-T3****Inductive proximity sensor****Technical data (typ.)****+20°C, 24 V DC**

Ambient temperature during operation

-25 ... +70 °C

Protection type

IP 67

Connection

Connector, M8, 3-pin

Connection cable

TK ...

More information / accessories<https://www.di-soric.com/209294>