


Ringlight

-

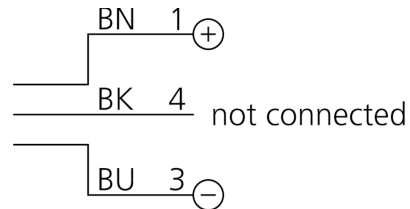

BU: blue

[illegible]

(2)



209557
BE-R30-G0-K-BS-CLR
Ringlight

Technical data (typ.)		+20°C, 24 V DC
Shock/vibration load		30 g, 11 ms / 10 ... 55 Hz, 1.0 mm
Ambient temperature during operation		0 ... +40 °C
Protection type		IP 67
Connection		Pigtail, 0.3 m, M12, 3-pin
Connection cable		VK ...
More information / accessories		https://www.di-soric.com/209557