


Plastic fiber optics

-

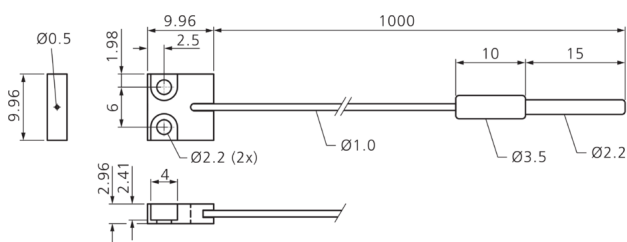

+20°C

Length	1,000 mm (cannot be shortened)
Housing dimensions	10 x 10 x 3 mm
Light aperture	axial
Bending radius	> 1 mm
Fiber	Ø 0.5 mm
Material	■ Metal (Sensor probe) ■ PE (Coating)
Operating principle	Through-beam sensor
Design	Cuboid design
To be used for	Device series OLV-K Amplifier
Range	200 mm
Resolution	Ø 0.05 mm
Temperature resistance	-40 ... +70 °C

<https://www.di-soric.com/209970>