




- Metal/plastic housing
- Turnable metal thread
- Quick mounting without tools
- 4-pin
- High protection type of up to IP 67



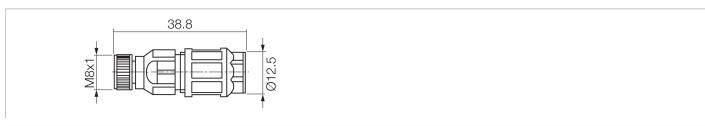

Function							
						(€	I

Technical data (typ.)	+20°C, 24 V DC
Service voltage	30 V DC
Housing material	Metal / Plastic
For Ø cable	2.5 5.0 mm
For Ø wire	1.1 1.55 mm (Wire must not be stripped!)
For strand cross-section	0.25 0.50 mm <sup>2</sup>
Design	straight
Ambient temperature during operation	-25 +80 °C
Protection type	IP 67
Sensor-side connection	Socket, M8 x 1, 4-pin
Control-side connection	Field-wireable, Insulation displacement connectors

More information / accessories https://www.di-soric.com/213043