


Inductive ring sensor

-
- The image shows a black, rectangular, ruggedized electronic device, likely a sensor or actuator. It has a threaded metal fitting on the left side and a circular opening on the top surface. The device features a label with technical specifications and the 'bl-servo' logo. The label includes the following text: 'bl-servo', '12VDC', '500mA', 'IP67', 'CE', 'RoHS', 'REACH', 'EN 60947-1', 'EN 60947-2', 'EN 60947-3', 'EN 60947-4', 'EN 60947-5', 'EN 60947-6', 'EN 60947-7', 'EN 60947-8', 'EN 60947-9', 'EN 60947-10', 'EN 60947-11', 'EN 60947-12', 'EN 60947-13', 'EN 60947-14', 'EN 60947-15', 'EN 60947-16', 'EN 60947-17', 'EN 60947-18', 'EN 60947-19', 'EN 60947-20', 'EN 60947-21', 'EN 60947-22', 'EN 60947-23', 'EN 60947-24', 'EN 60947-25', 'EN 60947-26', 'EN 60947-27', 'EN 60947-28', 'EN 60947-29', 'EN 60947-30', 'EN 60947-31', 'EN 60947-32', 'EN 60947-33', 'EN 60947-34', 'EN 60947-35', 'EN 60947-36', 'EN 60947-37', 'EN 60947-38', 'EN 60947-39', 'EN 60947-40', 'EN 60947-41', 'EN 60947-42', 'EN 60947-43', 'EN 60947-44', 'EN 60947-45', 'EN 60947-46', 'EN 60947-47', 'EN 60947-48', 'EN 60947-49', 'EN 60947-50', 'EN 60947-51', 'EN 60947-52', 'EN 60947-53', 'EN 60947-54', 'EN 60947-55', 'EN 60947-56', 'EN 60947-57', 'EN 60947-58', 'EN 60947-59', 'EN 60947-60', 'EN 60947-61', 'EN 60947-62', 'EN 60947-63', 'EN 60947-64', 'EN 60947-65', 'EN 60947-66', 'EN 60947-67', 'EN 60947-68', 'EN 60947-69', 'EN 60947-70', 'EN 60947-71', 'EN 60947-72', 'EN 60947-73', 'EN 60947-74', 'EN 60947-75', 'EN 60947-76', 'EN 60947-77', 'EN 60947-78', 'EN 60947-79', 'EN 60947-80', 'EN 60947-81', 'EN 60947-82', 'EN 60947-83', 'EN 60947-84', 'EN 60947-85', 'EN 60947-86', 'EN 60947-87', 'EN 60947-88', 'EN 60947-89', 'EN 60947-90', 'EN 60947-91', 'EN 60947-92', 'EN 60947-93', 'EN 60947-94', 'EN 60947-95', 'EN 60947-96', 'EN 60947-97', 'EN 60947-98', 'EN 60947-99'. The label also includes the 'bl-servo' logo and the text 'bl-servo'.

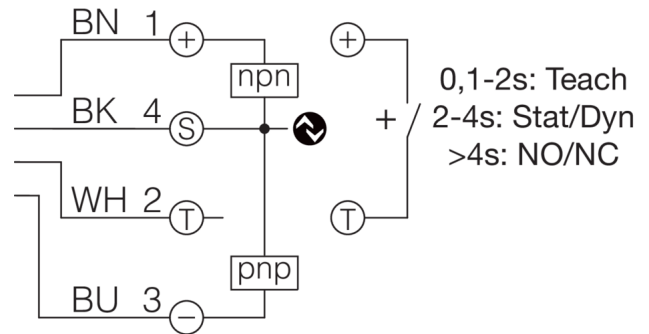

WH: white

[illegible]2)

**213668****IRSD-15-G3-B4****Inductive ring sensor****Technical data (typ.)****+20°C, 24 V DC**

Permissible relative humidity

< 95% (+25°C) / < 90% (+40°C), non-condensing (increased humidity affects the sensor nominal resolution)

Protection type

IP 67

Connection

Connector, M12, 4-pin, A-coded

Connection cable

VK ...

More information / accessories<https://www.di-soric.com/213668>