





BE-R-MOUNTINGSET

BE-R-MOUNTINGSET
BE-R-MOUNTINGSET
KIT DE MONTAGE BE-R

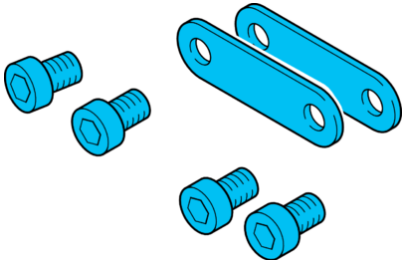

di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.com · www.di-soric.com



mm



Technische Daten	Technical data	Caractéristiques techniques	
Geeignet für	To be used for	Convient pour	Ringbeleuchtungen BE-R30..., Ringbeleuchtungen BE-R70... / Ringlights BE-R30..., Ringlights BE-R70... / Anneaux lumineux BE-R30..., Anneaux lumineux BE-R70...
Lochabstand	Hole spacing	Espacement des trous	25 mm
Größe	Size	Dimensions	35 x 10 x 2 mm
Material	Material	Matériau	Aluminium (eloxiert) / Aluminum (Anodized) / Aluminium (Anodisé)
Lieferumfang	Scope of delivery	Contenu de la livraison	2 Verbindungselemente, 4 Zylinderkopfschrauben M4x6 / 2 connecting elements, 4 cylinder head screws M4x6 / 2 éléments de liaison, 4 vis à tête cylindrique M4 x 6


Stand 03.11.23, Änderungen vorbehalten
As of 11/03/23, subject to change
État 03.11.23, sous réserve de modifications






BE-R-MOUNTINGSET

BE-R 安装支架套装

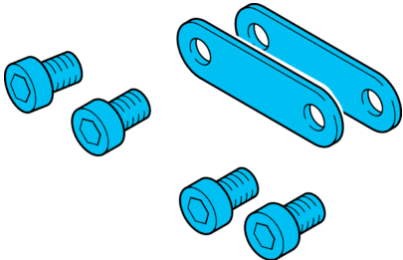

di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.com · www.di-soric.com



技术数据	
适合用于	环形光源 BE-R30..., 环形光源 BE-R70...
孔距	25 mm
尺寸	35 x 10 x 2 mm
材料	铝 (阳极氧化)
供货范围	2 个连接元件, 4 枚圆柱头螺丝 M4x6

版本 23.11.03，保留变更权