
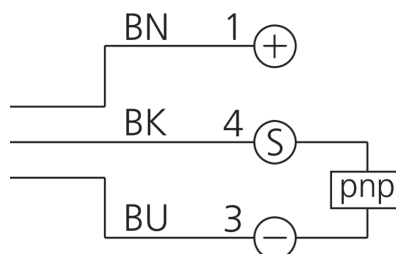


KDC 50 K 25 PNSOLK

- Detection of electrically conductive and electrically non-conductive materials
- Detection of liquids, powdery and solid materials
- Detection possible even through containers and packaging
- Sensitivity is adjustable
- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- I FD

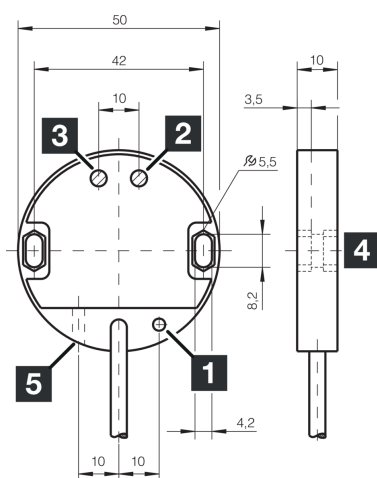

- 1) LED
- 2) Switch (pnp/npn)
- 3) NO/ NC

- 4) Sensing surface
- 5) sensitivity

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

di-soric GmbH & Co. KG · Steinbeisstraße 6 · DE-73660 Urbach · www.di-soric.com



200857
KDC 50 K 25 PNSOLK
Capacitive proximity switch

Technical data (typ.)**+20°C, 24 V DC**

Ambient temperature during operation

-30 ... +70 °C

Protection type

IP 67

Connection

Cable, 2.0 m

Connection cable

TK ...

More information / accessories<https://www.di-soric.com/200857>