



Retroreflective diffuse sensor

-

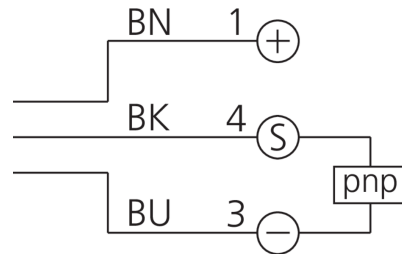

- BU: blue

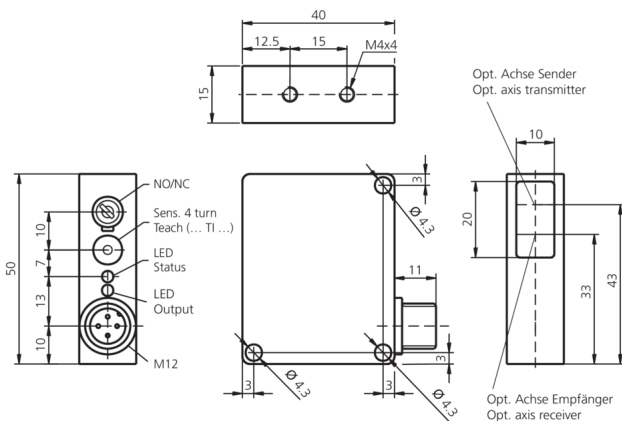

+20°C, 24 V DC

di-soric GmbH & Co. KG · Steinbeisstraße 6 · DE-73660 Urbach · www.di-soric.com



201552
OTV 50 M 600 P3K-IBS
Retroreflective diffuse sensor

Technical data (typ.)		+20°C, 24 V DC
Scanning range		100 ... 600 mm
Standardized measuring plate		200 x 200 mm (white)
Switching hysteresis (max.)		12 %
Reproducibility		< 1 %
Sensitivity adjustment		Potentiometer
Switching frequency		1000 Hz
Response time		0.50 ms
Release time		0.50 ms
Ambient temperature during operation		-10 ... +60 °C
Temperature drift		0.3 %/K
Protection type		IP 67
Connection		Connector, M12, 3-pin
More information / accessories		https://www.di-soric.com/201552