





201745

TSHM-Z-2.0/TKM-Z

Connection cable: Connector / coupling

- Drag chain compatible
- Sturdy metal union nut
- Flexible lead design
- High protection type
- Gold-plated plug-in contacts

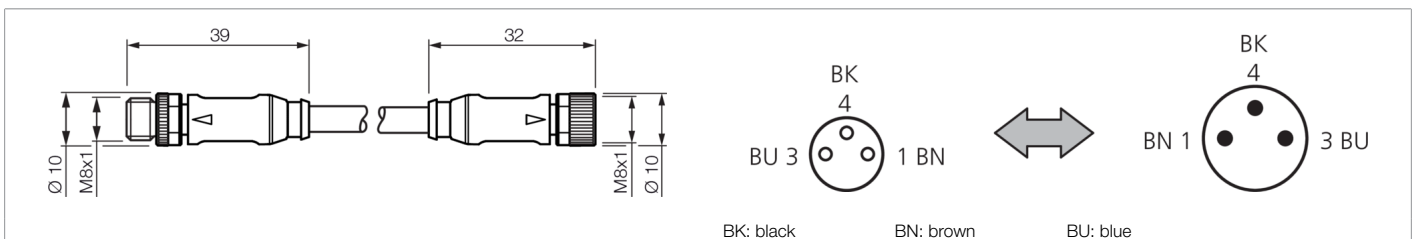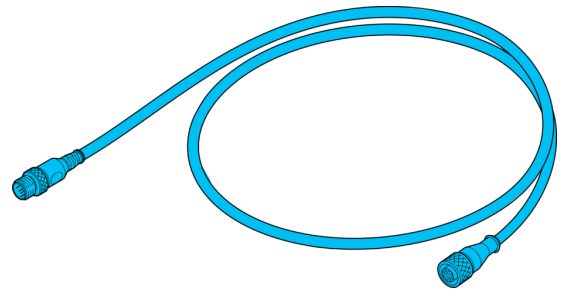

Function												



Technical data (typ.)		+20°C
Service voltage		< 60 V AC/DC
Length		2,000 mm
Diameter		Ø 4.3 mm (Diameter)
Thread		M8 x 1
Material of cable		Polyurethane
Material		Polyurethane (Connector)
Drag chain properties		■ < 2 Mio. (Bending cycles) ■ 3.3 m/s (Max. moving speed) ■ 5 m/s² (Max. acceleration)
Protection class		III, operation on protective low voltage
Component		Cable connection
Design		Straight / straight
Characteristics		Metal nut
Drag chain compatible		Yes
Ambient temperature during operation		-5 ... +80 °C (Movable, Fixed)
Protection type		IP 67 (at tightening torque 0.4 Nm)
Connection		Connector, M8, 3-pin, A-coded
Connection 2		Socket, M8, 3-pin, A-coded
Cross-section		0.25 x 0.25 mm (3 x)

More information / accessories	https://www.di-soric.com/201745
--------------------------------	---