
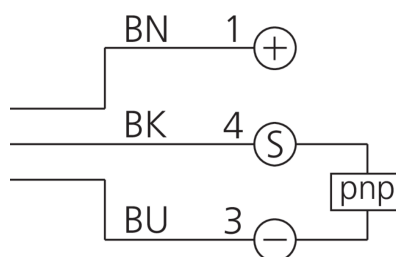


Plastic fiber-optic amplifier

-

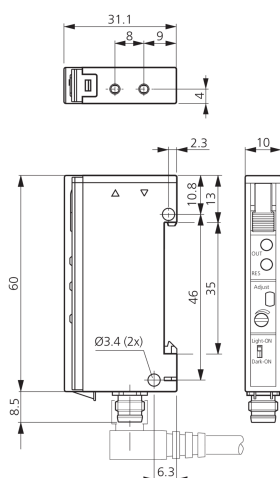

BU: blue

Technical data (typ.)

© di-soric . Right to change reserved . 14.03.2024 . Page 1



202652
OLVK 61 P3K-TSSL/3
Plastic fiber-optic amplifier

Technical data (typ.)		+20°C, 24 V DC
Display	No display	
Switching frequency	1500 Hz	
Response time	0.33 ms	
Release time	0.33 ms	
Ambient temperature during operation	-25 ... +55 °C	
Temperature drift	0.2 %/K	
Protection type	IP 64	
Connection	Connector, M8, 3-pin	
More information / accessories		https://www.di-soric.com/202652