





202763

LGUP 031 P3K-TSSL

Laser fork light barrier

- Visible laser spot
- High switching frequency
- Light/dark switching
- Metal casing
- Laser class 1
- High protection type
- Extremely bright ring LED

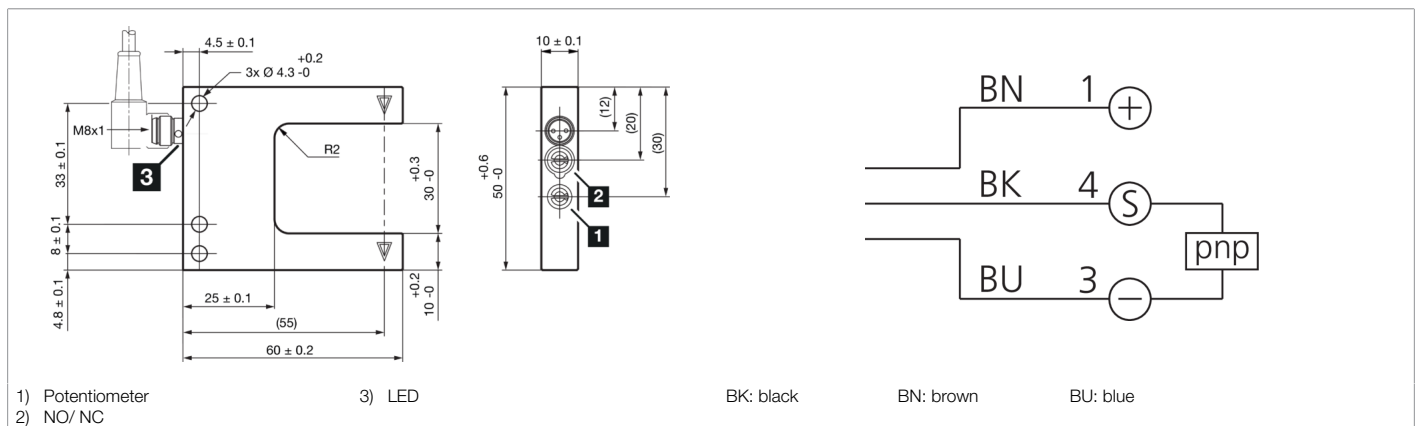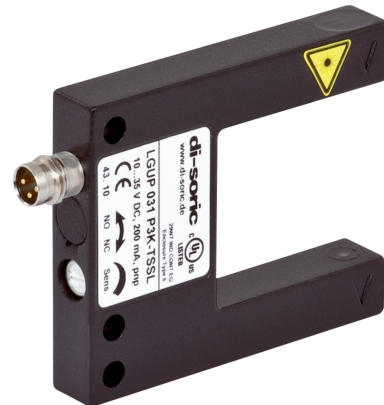

Function													
													

Technical data (typ.)		+20°C, 24 V DC
Service voltage		10 ... 35 V DC (Supply Class 2)
No-load current (max.)		30 mA
Insulation voltage endurance		500 V
Leg length internal		35 mm
Housing dimensions		50 x 60 x 10 mm
Housing length		60 mm
Housing height		50 mm
Housing width		10 mm
Housing material		Die-cast zinc (Black, painted)
Protection class		III, operation on protective low voltage
Operating principle		Optical
Evaluation		digital
Design		Fork
Switching output		pnp, 200 mA, NO/NC, switchable
Voltage drop (max.)		2.8 V
Light source		Laser
Laser class		1 (IEC 60825-1)
Color		red
Modulation		Clocked
Laser power		< 100 µW
Ambient light immunity		5 kLx
Fork opening		30 mm
Resolution		Ø 0.1 mm

**202763****LGUP 031 P3K-TSSL****Laser fork light barrier**

Technical data (typ.)		+20°C, 24 V DC
Switching hysteresis (max.)		0.05 mm
Reproducibility		0.02 mm
Sensitivity adjustment		Potentiometer
Switching frequency		3000 Hz
Ambient temperature during operation		0 ... +50 °C
Protection type		IP 67
Connection		Connector, M8, 3-pin
Connection cable		TK ...
More information / accessories		https://www.di-soric.com/202763