


Laser fork light barrier

-
- A black metal frame, likely a part of a machine, with a yellow warning label and a CE mark. The label contains the text "CAUTION" and "WARNING" in bold, along with a warning symbol (a triangle with an exclamation mark) and a small diagram of a person. The CE mark is also visible. The frame has a cylindrical component on the left side.



- BU: blue

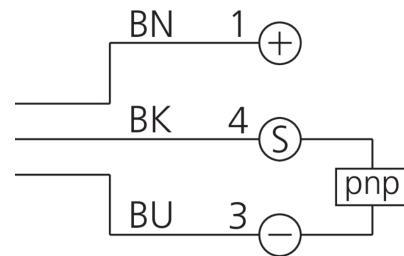

+20°C, 24 V DC

di-soric GmbH & Co. KG · Steinbeisstraße 6 · DE-73660 Urbach · www.di-soric.com



202766
LGUP 121 P3K-TSSL
Laser fork light barrier

Technical data (typ.)	+20°C, 24 V DC
Laser power	< 100 µW
Ambient light immunity	5 kLx
Fork opening	120 mm
Resolution	Ø 0.2 mm
Switching hysteresis (max.)	0.05 mm
Reproducibility	0.02 mm
Sensitivity adjustment	Potentiometer
Switching frequency	3000 Hz
Ambient temperature during operation	0 ... +50 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK ...
More information / accessories	https://www.di-soric.com/202766