
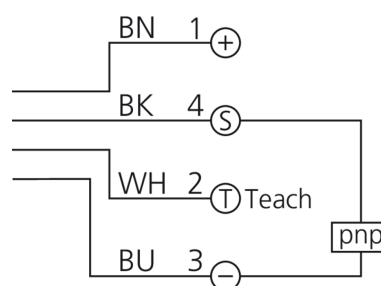


Plastic fiber-optic amplifier

-

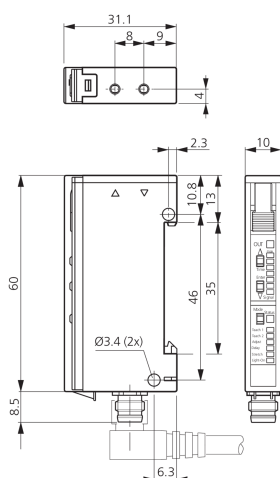

WH: white

CE

© di-soric . Right to change reserved . 03.11.2023 . Page 1

**203120****OLVKTI 61 P3K-TSSL/5000 Hz****Plastic fiber-optic amplifier**

Technical data (typ.)		+20°C, 24 V DC
Response time		0.10 ms
Release time		0.10 ms
Ambient temperature during operation		-25 ... +55 °C
Temperature drift		0.2 %/K
Protection type		IP 64
Connection		Connector, M8, 4-pin
More information / accessories		https://www.di-soric.com/203120