


Evaluation electronics

-

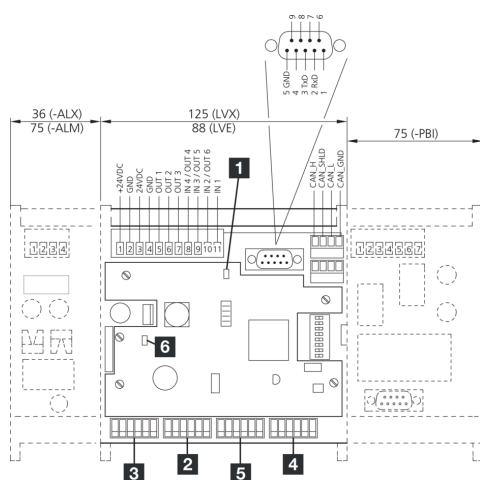

- 1) LED status inputs/outputs, mode In/Out (green)
- 2) Transmitter 1
- 3) Transmitter 2
- 4) Receiver 1
- 5) Receiver 2
- 6) LED SUPPLY (green)

[illegible]

© di-soric . Right to change reserved . 14.03.2024 . Page 1



203334
LVX-ALX
Evaluation electronics

Technical data (typ.)**+20°C, 24 V DC**

Display

LED (Error indicator)

Cycle time per light beam

0.05 ms (abhängig von Konfiguration und Reichweite der Lichtgitterleisten)

Ambient temperature during operation

0 ... +40 °C

Protection type

IP 00

Connection

Connection compartment

More information / accessories<https://www.di-soric.com/203334>