



Connection cable

- 

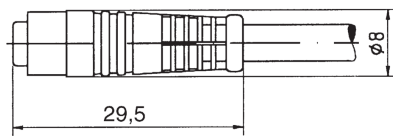

BU: blue

[illegible]

Service voltage	< 60 V AC/DC
Length	5,000 mm
Material of cable	PVC
Drag chain properties	70 mm (Min. bending radius)
Protection class	III, operation on protective low voltage
Design	Straight / open cable end
Characteristics	Click-stop device for thread M8
LED Anzeige	No
Ambient temperature during operation	-5 ... +80 °C (Movable, Fixed)
Protection type	IP 67
Connection	Click-stop device, M8, 3-pin, A-coded
Cross-section	0.25 mm² (3 x)

<https://www.di-soric.com/203512>