






203681

VKHM-W-5/8

Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

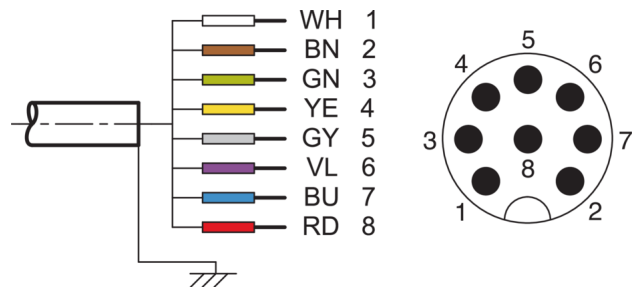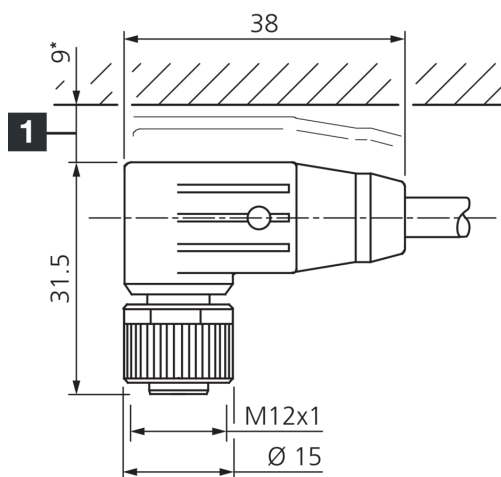

1) Mounting free space from upper edge of plug connector

BN: brown
BU: blue

GN: green
GY: grey

RD: red
VL: violet

WH: white
YE: yellow

Function



Technical data (typ.)

Service voltage	30 V AC/DC
Length	5,000 mm
Diameter	Ø 6.0 mm (Diameter)
Thread	M12
Material of cable	Polyurethane
Drag chain properties	60 mm (Min. bending radius)
Protection class	III, operation on protective low voltage
Design	Angled / open cable end
Characteristics	Metal nut
Drag chain compatible	Yes
LED Anzeige	No
Ambient temperature during operation	-25 ... +85 °C (Movable, Fixed)
Protection type	IP 65 / IP 66K / IP 67
Connection	Socket, M12, 8-pin, A-coded
Cross-section	0.25 mm² (8 x)

More information / accessories

<https://www.di-soric.com/203681>