


High-performance angled light barriers

-



- WH: white

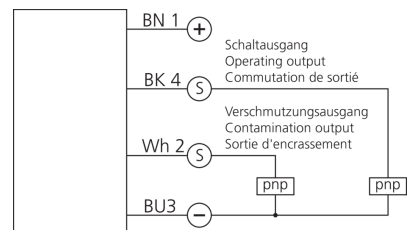

+20°C, 24 V DC

(2)



204195

OGL 55/54 P6L-RIBS

High-performance angled light barriers

Technical data (typ.)		+20°C, 24 V DC
Wavelength		660 nm
Modulation		Clocked
Ambient light immunity		5 kLx
Range		60 mm (optical axis)
Sensitivity adjustment		no setting elements
Switching frequency		200 Hz
Ambient temperature during operation		-10 ... +60 °C
Protection type		IP 67
Connection		Connector, M12, 4-pin
Connection cable		VK ...
More information / accessories		https://www.di-soric.com/204195