



Plastic fiber-optic amplifier

-
- di-soric**
DC-TS400 ultrasonic
Teil 1 + 480027181-9070-0 Fax: +49
240060 A

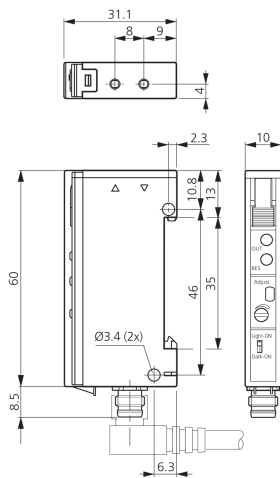

WH: white

Sensitivity adjustment	Potentiometer
------------------------	---------------



**204470****OLVK 61 P3FK-TSSL****Plastic fiber-optic amplifier**

Technical data (typ.)		+20°C, 24 V DC
Display		No display
Switching frequency		1500 Hz
Response time		0.33 ms
Release time		0.33 ms
Ambient temperature during operation		-25 ... +55 °C
Temperature drift		0.2 %/K
Protection type		IP 64
Connection		Connector, M8, 4-pin
More information / accessories		https://www.di-soric.com/204470