



-
- A black L-shaped metal frame, likely made of aluminum, with a label and a connector. The label is white with black text and a CE mark. The connector is a small, cylindrical metal component with a threaded cap. The frame is shown from a top-down perspective, highlighting its L-shape and the placement of the label and connector.

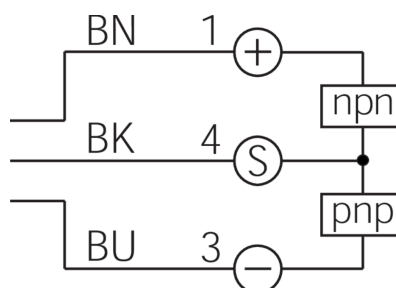

BU: blue

A diagram enclosed in a square frame. On the left is a vertical rectangle with a semi-circle on its right side. An arrow points to the right, where a horizontal rectangle with a semi-circle on its top side is shown.

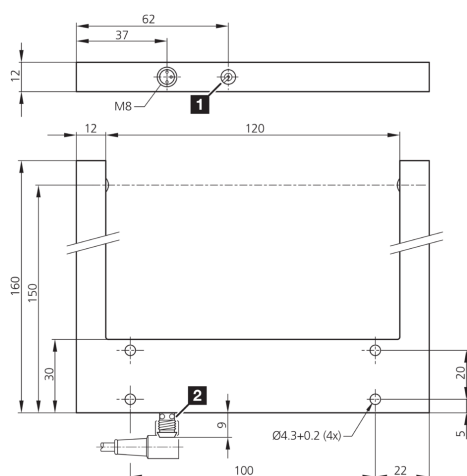

+20°C, 24 V DC

di-soric GmbH & Co. KG · Steinbeisstraße 6 · DE-73660 Urbach · www.di-soric.com

**205256****OGUP 120/130 G2K-TSSL****High-performance fork light barrier****Technical data (typ.)****+20°C, 24 V DC**

Fork opening	120 mm
Resolution	Ø 0.5 mm
Sensitivity adjustment	Potentiometer
Switching frequency	20 Hz
Ambient temperature during operation	-20 ... +60 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK ...

More information / accessories**<https://www.di-soric.com/205256>**