



Laser fork light barrier

-

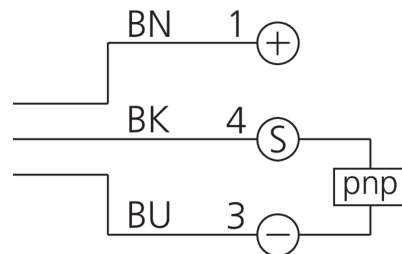

BU: blue

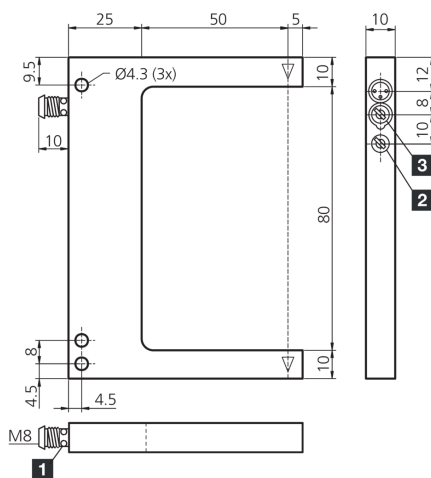

+20°C, 24 V DC

di-soric GmbH & Co. KG · Steinbeisstraße 6 · DE-73660 Urbach · www.di-soric.com



205654
LGUP 081 P3K-TSSL/V4A
Laser fork light barrier

Technical data (typ.)	+20°C, 24 V DC
Laser power	< 100 µW
Ambient light immunity	5 kLx
Fork opening	80 mm
Resolution	Ø 0.2 mm
Switching hysteresis (max.)	0.05 mm
Reproducibility	0.02 mm
Sensitivity adjustment	Potentiometer
Switching frequency	3000 Hz
Ambient temperature during operation	0 ... +50 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK ...
More information / accessories	https://www.di-soric.com/205654