




206306

BE 1-A130/120-G2-K-BS

Barlight

- Very compact design
- Homogeneous luminous field
- Cable outlet usable at the front or back side
- Universal mounting options
- Metal casing
- Homogeneous illumination
- High efficiency
- Robust metal housing

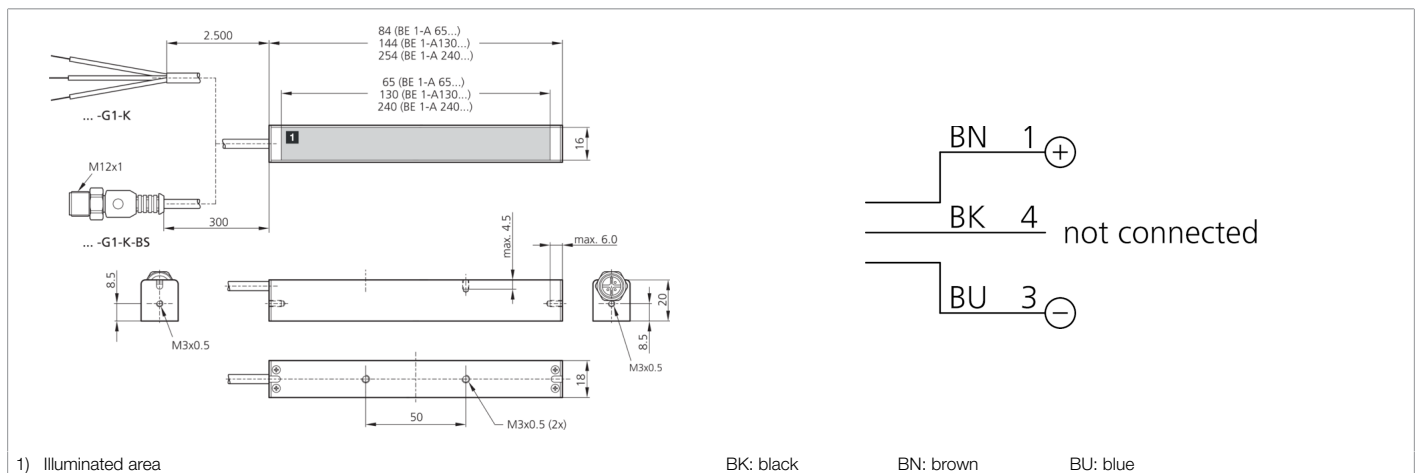

Function															
															C UL US LISTED
Technical data (typ.)						+20°C, 24 V DC									
Service voltage						24 V DC (Supply Class 2)									
Internal power consumption						160 mA (24 V DC)									
Power						3.8 W									
Illuminated area						130 x 16 mm									
Housing dimensions						16 x 20 x 144 mm									
Housing material						Aluminum (Anodized)									
Material						Polyurethane (Cable)									
Protection class						III, operation on protective low voltage									
Risk group (DIN EN 62471)						Free group									
Design						Barlight									
Light source						LED									
Color						green									
Wavelength						525 nm									
Deflection angle FWHM						120°									
Light intensity						■ 4.00 kLx (100.0 mm) ■ 1.20 kLx (200.0 mm) ■ 250 Lux (500.0 mm)									
Control						without power control									
Display						No									
Ambient temperature during operation						0 ... +40 °C (Continuous operation)									
Protection type						IP 20									
Connection						Pigtail, 0.3 m, M12									
Connection cable						VK ...									



206306
BE 1-A130/120-G2-K-BS
Barlight

[More information / accessories](#)

<https://www.di-soric.com/206306>