





206387

BEK-R70/120-G5TI-IBS-DIF

Ringlight

- Constant level of light intensity over the entire voltage range
- Internal control of power output
- Homogeneous illumination
- High protection type IP 67
- External trigger input
- High efficiency
- Light intensity can be adjusted
- Low levels of heat produced
- Sturdy housing design
- Metal casing

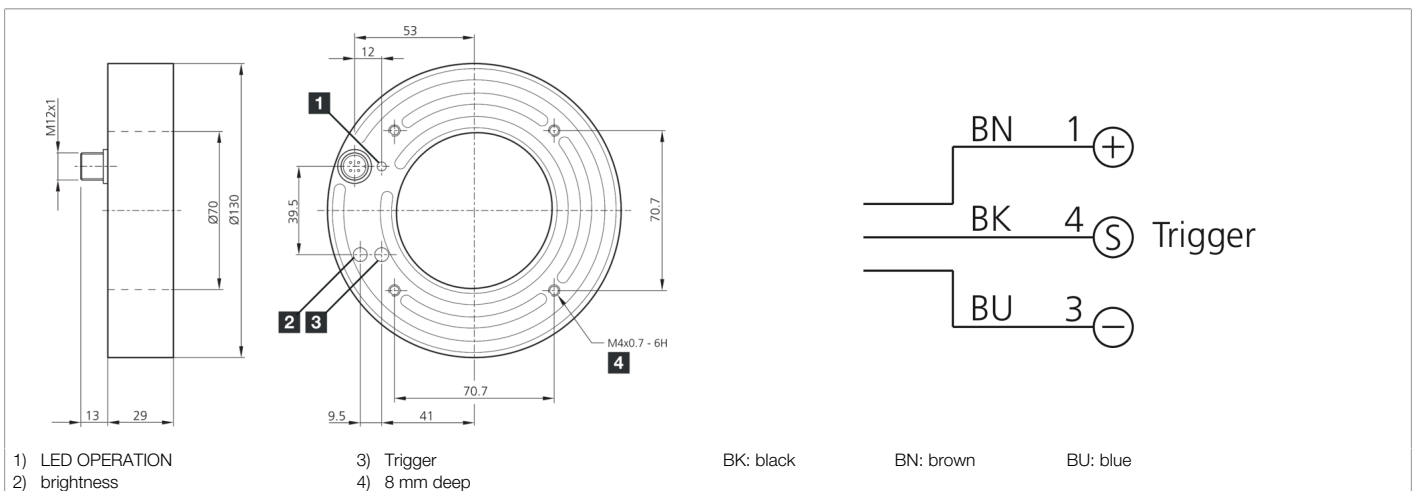

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	18 ... 35 V DC (Supply Class 2)
No-load current (max.)	560 mA (18 V DC)
Power	10.0 W (24 V DC)
Inverse polarity protection	Yes
Insulation voltage endurance	500 V
Diameter	Ø 70 / Ø 130 mm (Diameter)
Housing material	Aluminum (Anodized)
Material	PMMA, diffuse (Protection optics)
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Free group
Design	Ringlight
Trigger input high level	3.3 ... 35.0 V
Trigger input low level	< 2.8 V
Light source	LED
Color	White (diffuse)
Wavelength	6500 K
Deflection angle FWHM	120°
Light intensity	■ 9.20 kLx (100.0 mm) ■ 3.50 kLx (200.0 mm) ■ 0.800 kLx (500.0 mm)
Control	Integrated power control
Display	LED Green - Operating display

**206387****BEK-R70/120-G5TI-IBS-DIF****Ringlight****Technical data (typ.)****+20°C, 24 V DC**

Shock/vibration load

30 g, 11 ms / 10 ... 55 Hz, 1.0 mm

Ambient temperature during operation

0 ... +40 °C

Protection type

IP 67

Connection

Connector, M12, 3-pin

Connection cable

VK ...

More information / accessories<https://www.di-soric.com/206387>