





206551

LA 32-12.5-388-560 I-H

Light grids

- Horizontal beam evaluation
- Integrated evaluation electronics
- Switching output
- Fault alarm output
- Compact design
- Aluminum housing
- Easy to install

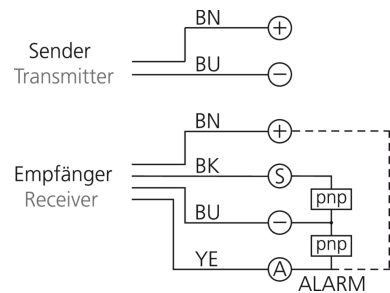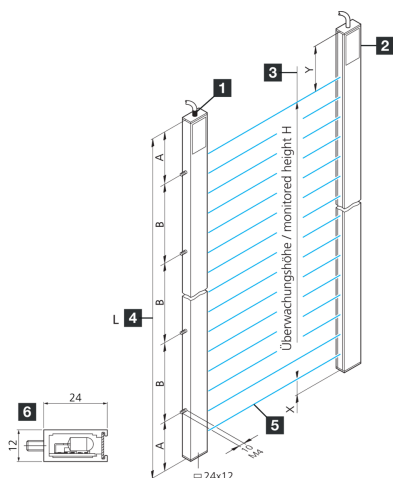

- 1) Transmitter
- 2) Receiver
- 3) Monitoring height H

- 4) Profile length L
- 5) Synchronous beam
- 6) Profile cross section

BK: black

BN: brown

BU: blue

YE: yellow

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	20.4 ... 28.8 V DC
Power consumption	8 W
Assembly	Threaded bolt (2)
Profile cross section	12 x 24 mm
Dimension	■ A: 80 mm ■ B: 400 mm ■ X: 13.5 mm ■ Y: 153.5 mm
Profile length	560 mm
Housing material	Aluminum (silver, Anodized)
Protection class	III, operation on protective low voltage
EMC directives	EN 61000-6-3:2001 / EN 61000-6-1:2001
Evaluation	horizontal
Evaluation electronics	integrated
Output function	Light switching
Switching output	pnp, 200 mA, NC, short-circuit-proof
Light source	LED
Color	Infrared
Wavelength	880 nm



206551
LA 32-12.5-388-560 I-H
Light grids

Technical data (typ.)		+20°C, 24 V DC
Beam evaluation		via integrated evaluation electronics
Beam separation		12.5 mm
Number of beams		32
Monitoring height		388 mm
Range		700 ... 4000 mm (factory setting)
Display		LED (Service voltage / output stage, error (alarm))
Cycle time per light beam		1 ms
Total cycle time		Anzahl Lichtstrahlen x 1 ms + 4 ms
Basic processing time		4 ms
Ambient temperature during operation		-10 ... +45 °C
Protection type		IP 54 (IP 65 optional)
Connection		Cable, 4.0 m (with ferrule)
More information / accessories		https://www.di-soric.com/206551