


Connection cable

-
- A black cable with a grey and black connector, likely a power or data cable, shown against a white background.

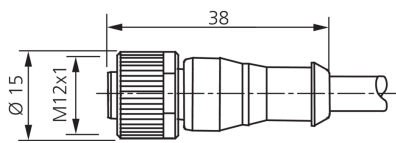

WH: white

BN + 1
BK S 4
WH S 2
BU - 3

CE



Service voltage	< 250 V AC/DC
Length	20,000 mm
Diameter	Ø 5.2 mm (Diameter)
Thread	M12
Material of cable	Polyurethane
Drag chain properties	80 mm (Min. bending radius)
Protection class	III, operation on protective low voltage
Design	Straight / open cable end
Characteristics	Metal nut
Drag chain compatible	Yes
LED Anzeige	No
Ambient temperature during operation	-5 ... +80 °C (Movable, Fixed)
Protection type	IP 67
Connection	Socket, M12, 4-pin, A-coded
Cross-section	0.34 mm ² (4 x)

<https://www.di-soric.com/206705>