




206720
BE 1-A65/120-G0-K-BS
Barlight

- Very compact design
- Homogeneous luminous field
- Cable outlet usable at the front or back side
- Universal mounting options
- Metal casing
- High efficiency
- Robust metal housing

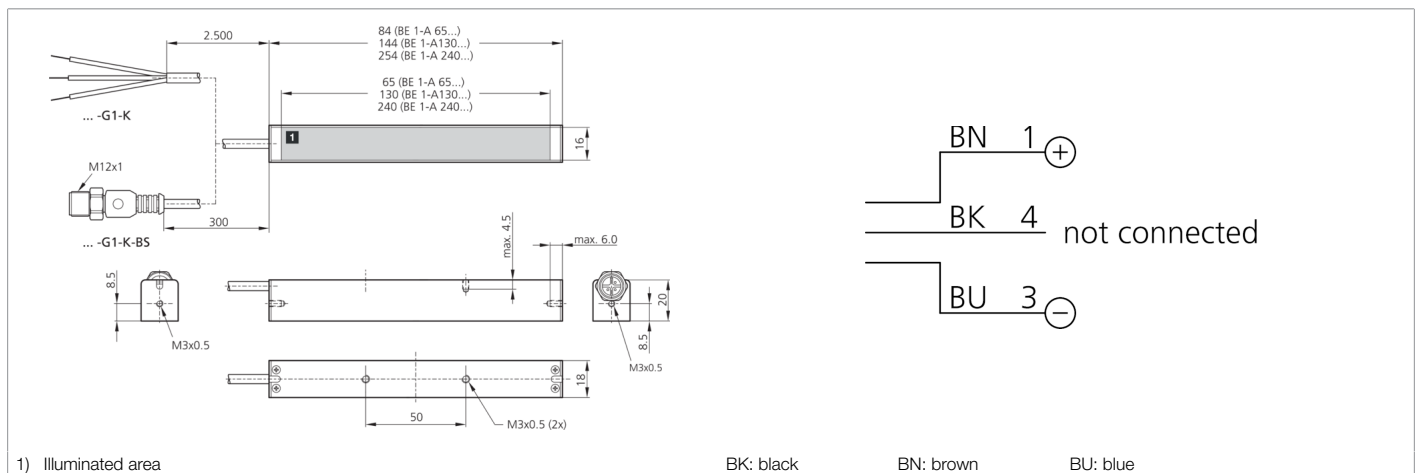

Function														
Technical data (typ.)							+20°C, 24 V DC							
Service voltage							24 V DC (Supply Class 2)							
Internal power consumption							90 mA (24 V DC)							
Power							2.2 W							
Inverse polarity protection							Yes							
Illuminated area							65 x 16 mm							
Housing dimensions							16 x 20 x 84 mm							
Housing material							Aluminum (Anodized)							
Risk group (DIN EN 62471)							Free group							
Design							Barlight							
Light source							LED							
Color							Infrared							
Wavelength							850 nm							
Deflection angle FWHM							120°							
Light intensity							■ 1100 µW/cm² (100.0 mm) ■ 300 µW/cm² (200.0 mm) ■ 60.0 µW/cm² (500.0 mm)							
Control							without power control							
Ambient temperature during operation							0 ... +40 °C (Continuous operation)							
Protection type							IP 20							
Connection							Pigtail, 0.3 m, M12, 3-pin							
Connection cable							VK ...							
More information / accessories							https://www.di-soric.com/206720							