
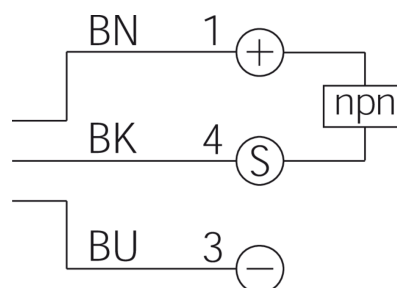


Inductive proximity sensor

- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

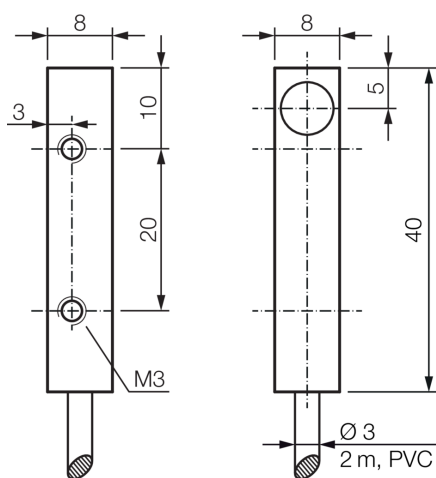

BU: blue

CE

© di-soric . Right to change reserved . 10.01.2024 . Page 1

**207047****DCCQ 08 M 02 NOLK****Inductive proximity sensor**

Technical data (typ.)		+20°C, 24 V DC
Standardized measuring plate		8 x 8 x 1 mm
Switching hysteresis (max.)		< 15 %
Switching frequency		2000 Hz
Ambient temperature during operation		-25 ... +70 °C
Protection type		IP 67
Connection		Cable, 2.0 m, A-coded
More information / accessories		https://www.di-soric.com/207047