



Ringlight

-

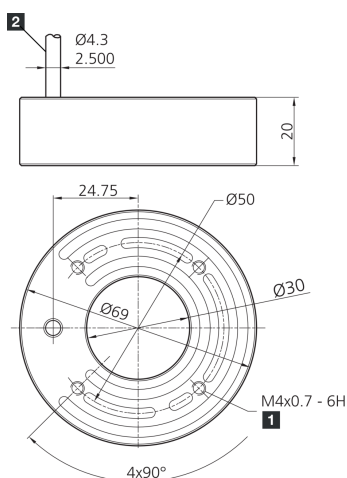

2) Connection cable



A utiliser exclusivement
avec un contrôleur
d'impulsion connecté a
une alimentation *Class 2!*

Technical data (typ.)

Power consumption (in pulse / max.)	45.0 W
Energization factor (in pulse / max.)	10
Energization (in pulse / max.)	2000 mA
Service voltage	No constant voltage!
Inverse polarity protection	Yes
Insulation voltage endurance	500 V
Diameter	Ø 30 / Ø 69 mm (Diameter)
Height	20 mm
Housing material	Aluminum (Black, Anodized)
Material	■ Polyurethane (Cable) ■ PMMA, clear (Protection optics)
Risk group (DIN EN 62471)	Free group
Design	Ringlight
Light source	LED
Color	White (clear)
Wavelength	6500 K
Deflection angle FWHM	120°



207142
BE-R30-F5-K-CLR
Ringlight

Technical data (typ.)

Light intensity

+20°C, 24 V DC

- 5.10 kLx (100.0 mm / 100 %)
- 19.1 kLx (100.0 mm / 500 %)
- 30.0 kLx (100.0 mm / 1000 %)
- 1.50 kLx (200.0 mm / 100 %)
- 5.60 kLx (200.0 mm / 500 %)
- 8.10 kLx (200.0 mm / 1000 %)

Control

Flashable by means of flash controller

Shock/vibration load

30 g, 11 ms / 10 ... 55 Hz, 1.0 mm

Ambient temperature during operation

0 ... +40 °C

Protection type

IP 67

Connection

Cable, 2.5 m (flying leads, Use only with flash controller!)

More information / accessories

<https://www.di-soric.com/207142>