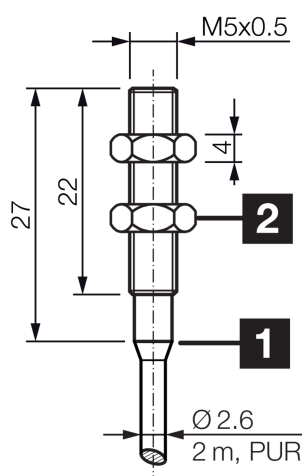




1) LED

2) Width over flats 8 mm

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	10 ... 30 V DC
No-load current (max.)	10 mA
Insulation voltage endurance	500 V
Installation type	Flush
Thread	M5 x 0.5
Housing material	Stainless steel (V2A 1.4301 / AISI 304)
Material	Polyurethane (Cable)
Tightening torque (max.)	1.5 Nm
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Thread
Product series	INSM Standard Miniature
Switching output	npn, 100 mA, NC
Voltage drop (max.)	2.4 V
Switching distance (SN)	0.8 mm
Standardized measuring plate	5 x 5 x 1 mm
Switching hysteresis (max.)	15 %
Switching frequency	2000 Hz
Ambient temperature during operation	-25 ... +70 °C



208015
DCC 05 M 0.8 NOLK
Inductive proximity sensor

Technical data (typ.)**+20°C, 24 V DC**

Protection type

IP 67

Connection

Cable, 2.0 m

More information / accessories<https://www.di-soric.com/208015>