



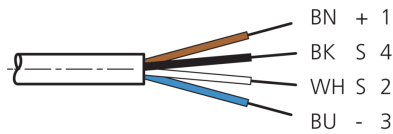

208227
VKHM-Z-5/4-A
Connection cable

- Sturdy metal union nut
- Flexible lead design
- Durable PU coating
- Good stripping properties
- Chemically stable

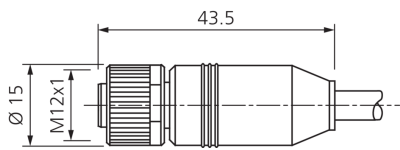

BK: black BN: brown BU: blue WH: white

Function														 	

Technical data (typ.)	
Service voltage	60 V AC/DC (with max. 4.0 A)
Length	5,000 mm
Thread	M12
Material of cable	Polyurethane
Drag chain properties	10 x Ø (Min. bending radius)
Protection class	III, operation on protective low voltage
Design	Straight / open cable end
Characteristics	Shielded, Metal nut
Drag chain compatible	Yes
LED Anzeige	No
Ambient temperature during operation	-25 ... +85 °C (Movable, Fixed)
Protection type	IP 65 / IP 66K / IP 67
Connection	Socket, M12, 4-pin, A-coded
Cross-section	0.34 mm ² (4 x)

More information / accessories	https://www.di-soric.com/208227
--------------------------------	---