




- Easy assembling and disassembling of the light grid
- Easy height adjustment of the first beam
- With rear cable entry
- Robust column made of aluminum extrusion poles
- With adjustable angular orientation
- Integrated spherical spirit level to check the correct vertical column axis



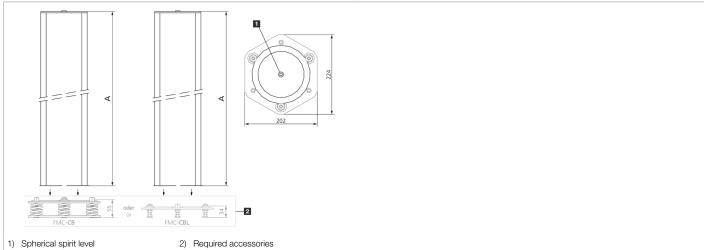

Technical data (typ.)	
Total height (A)	1330 mm
Housing material	Aluminum rod profile (Epoxy powder coating) / Plastic
Operating principle	Mounting column
Characteristics	built-in spherical spirit level
To be used for	3 beam safety light grids, 4 beam safety light grids
Features	Rear cable entry (PG11 cable gland)
Scope of delivery	Assembly instructions, 2 adjustable fixing brackets, Fixing material
More information / accessories	https://www.di-soric.com/208369