



- Focusing the light beam on a small measuring spot diameter
- Robust design
- Focusing the light beam on a small measuring spot diameter
- Enables color measurement on the smallest surfaces



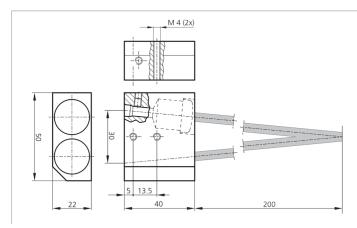

Technical data (typ.)	+20°C, 24 V DC
Housing material	Aluminum (Anodized)
Component	Focus optics
Operation with	WRB 220 S-4.5-2.5
For FSB 50 M 60 G3-B8	To be used with WRB 220 S-4.5-2.5
For FS 50 M G3-B8	To be used with WRB 220 S-4.5-2.5
For FS 12-100-1 M G3-B8	To be used with WRB 220 S-4.5-2.5
For FS 12-100-1 M G3-B8-E	To be used with WRB 220 S-4.5-2.5
For FS 12-100-2 M G3-B8	To be used with WRB 220 S-4.5-2.5
Light spot size	Ø 20 mm
Working distance	200.0 mm
Working range	150 300 mm
More information / accessories	https://www.di-soric.com/209503