




- Universal IO-Link Master with PC software
- For devices with IODD Specification 1.0.1 and 1.1
- Status LED for IO-Link and SIO mode
- M12 connection for devices
- Up to 80 mA over USB connection
- Up to 1 A with AC adapter



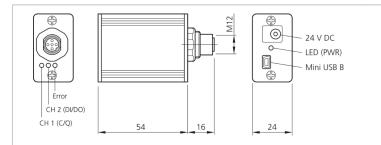

Function				
IO-Link				<b>CE</b>

Technical data (typ.)	+20°C, 24 V DC
Inverse polarity protection	Yes
Power supply	5 V / 500 mA (PC USB), 24 V / 80 mA (IO-Link device from USB), 24 V / 1 A (IO-Link device
	from the power supply)
Protection class	III, operation on protective low voltage
To be used for	For devices with IODD Specification 1.0.1 and 1.1
Scope of delivery	USB IO-Link Master V2, USB A-B cable, Power supply 24 V DC / 24 W
Functions	With PC
Communication	IO-Link specification V 1.1, IO-Link port class A
Ambient temperature during operation	0 +45 °C
Protection type	IP 20
Connection	USB (Mini USB B, TYPE 2.0)
Connection 2	Socket, M12
Connection 3	Power supply
More information / accessories	https://www.di-soric.com/210075