





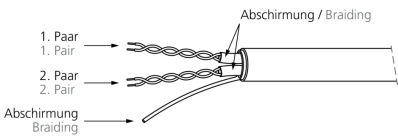

**210490**  
**MC 25**  
**MS connecting cable RS485**

- Flexible lead design
- Good stripping properties
- Shielded

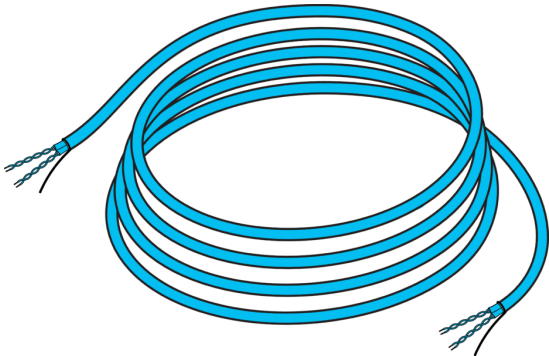

Function														 	
Technical data (typ.)							+20°C, 24 V DC								
Length							25,000 mm								
Operating principle							Connecting cable RS485								
Design							flying leads								
Characteristics							Shielded								
Application							Connection of MS-CTx interface modules								
Design							Serial RS485 cable								
Connection							flying leads, 5-pin (flying leads)								
Connection 2							5-pin (flying leads)								
More information / accessories							<a href="https://www.di-soric.com/210490">https://www.di-soric.com/210490</a>								