


Ringlight

-

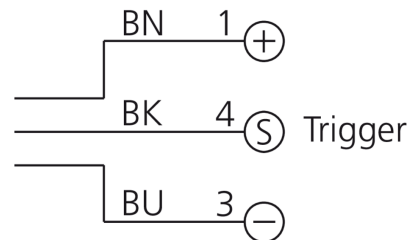

BU: blue

(2)



210516
BEK-R33-E0T-K-BS
Ringlight

Technical data (typ.)	+20°C
Frequency (max.)	20 Hz
Illumination time / pulse	2 ms
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1.0 mm
Ambient temperature during operation	0 ... +40 °C
Protection type	IP 67
Connection	Pigtail, 0.3 m, M12, 3-pin
More information / accessories	https://www.di-soric.com/210516