



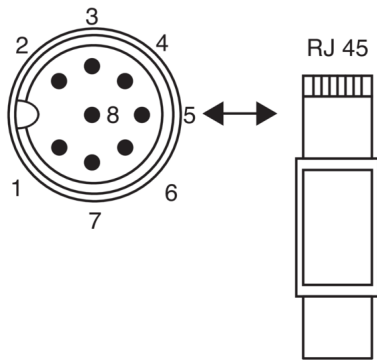

210611
VKHM-Z-25/RJ45
Ethernet cable

- For Ethernet connection
- Drag chain compatible
- Oil-resistant

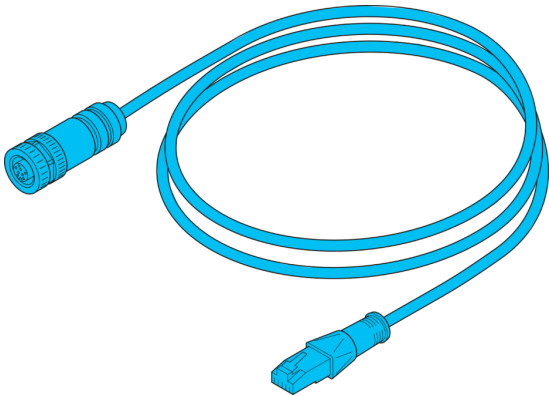

PIN	Port B: Ethernet
1	V (+)
2	V (-)
3	V (-)
4	TX (-)
5	RX (+)
6	TX (+)
7	V (+)
8	RX (-)

Function													 	

Technical data (typ.)		+20°C, 24 V DC
Service voltage		30 V DC
Length		25,000 mm
Thread		M12
Material of cable		Polyurethane
Drag chain properties		■ > 10 Mio. (Bending cycles) ■ 7.5 x Ø (Min. bending radius) ■ 3 m/s (Max. moving speed) ■ 5 m/s² (Max. acceleration) ■ ± 30 °/m (Max. torsion)
Protection class		III, operation on protective low voltage
Component		Interface cable
Design		Straight / straight
Drag chain compatible		Yes
Ambient temperature during operation		-40 ... +80 °C
Protection type		IP 67
Connection		Socket, M12, 8-pin, X-coded
Connection 2		Connector, RJ 45, 8-pin
More information / accessories		https://www.di-soric.com/210611