


- Enables no-load switching of color channels
- Setting brightness of the connected SBI-RGB
- Status display via LEDs
- Overload display via LEDs
- Locked overload shutdown, resettable via voltage reset

[illegible]

© di-soric . Right to change reserved . 03.11.2023 . Page 1

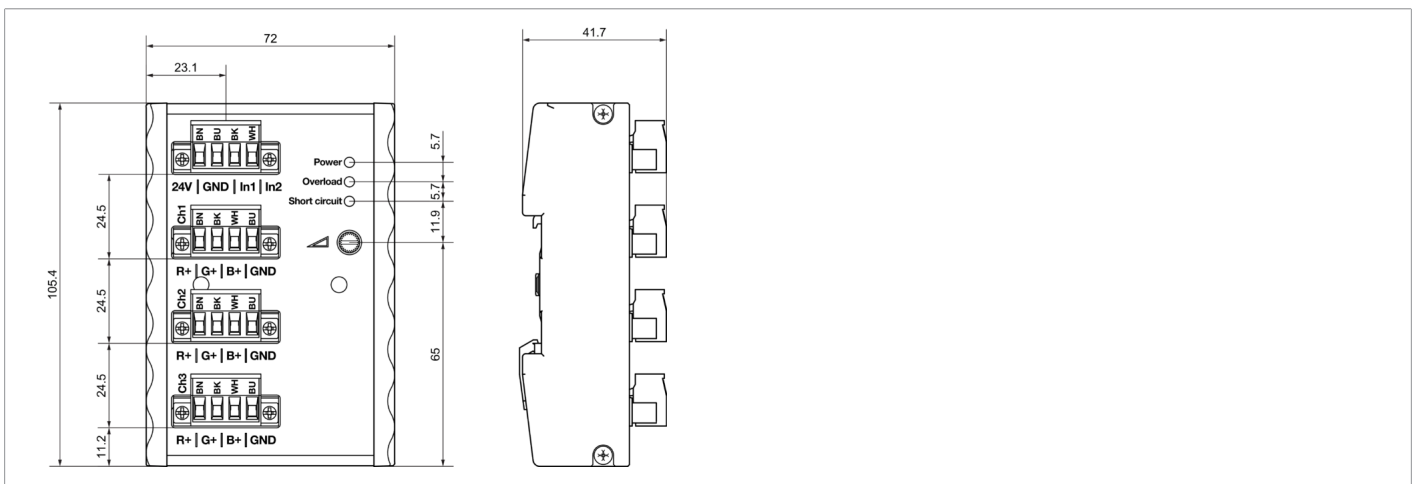

210905
SBI-RGB Controller
Control unit for SBI-RGB

Technical data (typ.)**+20°C, 24 V DC**

Switching frequency

200 Hz (PWM)

Ambient temperature during operation

+5 ... +45 °C

Protection type

IP 20

Connection

Clamps, 4-pin

More information / accessories<https://www.di-soric.com/210905>