





212673

KNS D6.5KM 3N G3-T3

Capacitive proximity switch

- Large operating distance
- Detection of liquids, powdery and solid materials
- Detecting metal and non-metal parts
- Detection possible even through containers and packaging
- Sensitivity adjustable via IO-Link
- NO/NC, switchable via IO-Link
- Push-pull output pnp + npn
- Robust metal housing

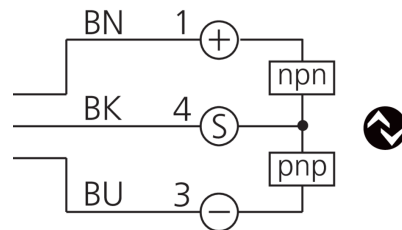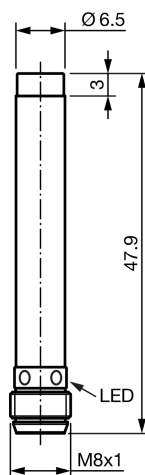

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	18 ... 30 V DC
No-load current (max.)	15 mA
Insulation voltage endurance	500 V
Installation type	non-flush
Diameter	Ø 6.5 mm (Diameter)
Housing length	47.9 mm
Housing material	Brass (nickel-plated)
Protection class	III, operation on protective low voltage
Operating principle	Capacitive
Design	Cylinder
Operation modes	STANDARD, HIGH RESOLUTION, SPEED
Switching output	Push-pull, 100 mA, NO/NC
Voltage drop (max.)	2 V
Interface	IO-Link
Switching distance (SN)	3 mm (0.2 to 4 mm adjustable via IO-Link)
Standardized measuring plate	12 x 12 mm
Switching hysteresis (max.)	< 15 %
Sensitivity adjustment	IO-Link
Display	LED yellow - Output signal
Switching frequency (factory setting)	100 Hz (STANDARD)

**212673****KNS D6.5KM 3N G3-T3****Capacitive proximity switch****Technical data (typ.)****+20°C, 24 V DC**

Switching frequency (STANDARD)	100 Hz
Switching frequency (HIGH RESOLUTION)	100 Hz
Switching frequency (SPEED)	200 Hz
Readiness delay (max.)	300 ms
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 65 / IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK ...

More information / accessories**<https://www.di-soric.com/212673>**